

KPM-22E


Optical Power Meter




Product Features

- High sensitivity and large dynamic range.
- Universal connector: FC/SC/ST/LC.
- dBm and xW measurement.
- Automatically power off.
- Pocket size design.
- Fast response without preheating.
- Low power display.

Product Features



Plug and
play



Press to
start



6 wavelengths




Auto-off



Dust cap

Product Features

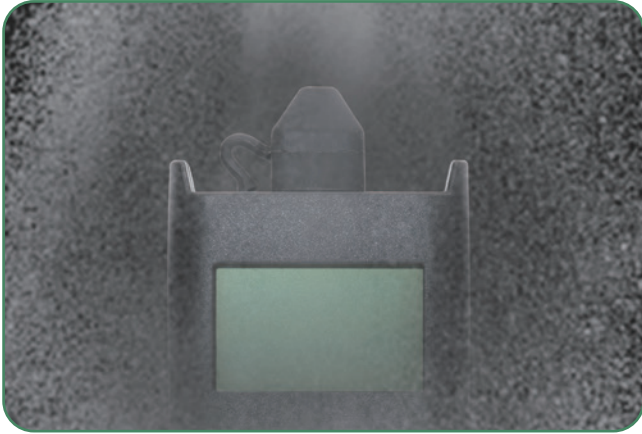

Support 4 types of optical fiber connectors



SC



ST



FC



LC(optional)

Specification

Model	KPM-22E
Wavelength(nm)	850/1300/1310/1490/1550/1625
Applicable fiber	SM,MM
Detector type	InGaAs
Measuring range(dBm)	-70~+10
Uncertainty	5%
Output Power(dBm)	---
Connector type	2.5mm Universal Connector for FC、SC、ST
Working temperature(°C)	-10 to +60
Storage temperature(°C)	-70~+3
Battery	Alkaline Battery (2AAA 1.5V batteries)
Contionous working time(h)	240
Dimensions(mm)	131(L)x64(W)x34(H)
Weight(g)	160

Product display



CONTACT US:

KomShine Technologies Limited

HEAD OFFICE:

2F Bldg. D Qinhen Tech. Pk. Nanjing, JS, 210001, China

TEL: +86 25 66047688

www.komshine.com

ventas@komshine.com

* Komshine reserves the right to improve, enhance, or modify the of KomShine products without prior notification.

*Company and product names appearing in this catalogue are re respective companies.

* This catalogue is printed using environmentally friendly paper a